
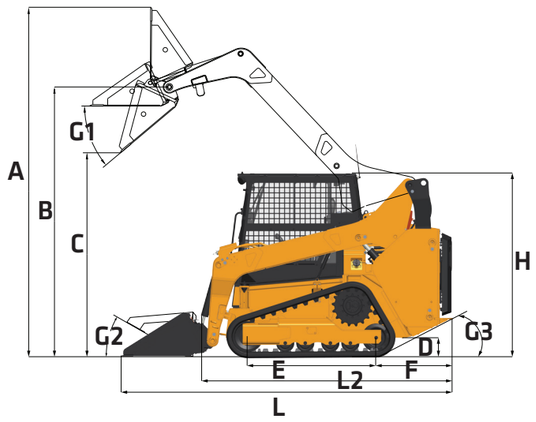


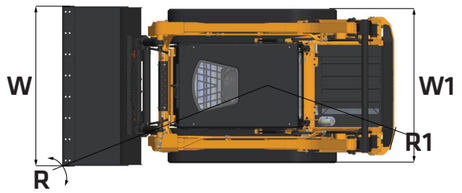

DIMENSIONS

A	Maximum Overall Height	156”
B	Bucket Pin Height at Maximum Lift	120.5”
C	Clearance at Maximum Lift and Dump	92”
D	Ground Clearance	9”
E	Track Length on Ground	57.5”
F	Bumper Overhang Behind Rear Axle	34.8”
G1	Maximum Dump Angle	40°
G2	Rollback Angle of Bucket on Ground	30°
G3	Departure Angle	28°
H	Height of Top of Cab	82.7”
L	Length with Bucket on Ground	142.1”
L1	Reach at Maximum Lift and Dump	42”
L2	Length without Bucket	113.6”
R	Turning Radius from Center-Bucket	82.7”
R1	Turning Radius From Center-Machine Rear	66.3”
W	Width with Bucket	72”
W1	Width without Bucket	70”

In the interest of continual equipment development, SANY America Inc. reserves the right to change these specifications at any time without prior notification. ©2026 SANY America Inc. HEXPS26ST230V001

INDUSTRY’S STRONGEST STANDARD WARRANTY | 3-YEAR* 3,000 HOURS

*WARRANTY APPLIES TO 2026 TELEHANDLER, GRADER, ROLLER, TRACK LOADER AND CRANE MODELS ONLY.

SANY America Inc. 318 SANY Way
Peachtree City, Georgia 30269
470.552.SANY sanyamerica.com

ST230V

COMPACT TRACK LOADER

10,318 LBS OPERATING WEIGHT
73 HP NET ENGINE POWER
7,368 LBS TIPPING LOAD

TECHNICAL SPECIFICATIONS

ENGINE	
Engine Model	Yanmar 4TNV98CT
Non-Road Emission Standard	Tier 4 Final / Stage V
Cylinders	4
Displacement	–
Rated Engine Power	73 hp
Peak Torque	206 lbf-ft @ 1,560 rpm

OPERATING	
Rated Operating Capacity	2,579 lbs
Tipping Load	7,368 lbs
Operating Weight	10,318 lbs
Max. Breakout Force	5,733 lbf
Lift Geometry	Vertical Lift
One Speed	5.4 mph
Two Speed	8.5 mph
Rubber Track Size	12.6”, 15.75” (each in two patterns)
Standard Flow	21 gpm
High Flow	31.6 gpm
Cab	FOPS I & ROPS

*Operating weight is for the ST230V with no attachments, and standard stick.

SANY America Inc. reserves the right to change these specifications at any time without prior notification. ©2026 SANY America Inc. HEXPS26ST230V001

COMPACT TRACK LOADER ST230V

10,318 LBS OPERATING WEIGHT
73 HP NET ENGINE POWER
7,368 LBS TIPPING LOAD

STANDARD FEATURES

ENGINE
Tier 4 final/stage V certified
One-click startup
Power mode
Cold start aid
Dual element air filter

POWERTRAIN
Two-speed hydrostatic
Rubber tracks (320mm/400mm)
Anti-derailment rollers
Service brake: hydrostatic
Parking brake: mechanical

HYDRAULIC
Pilot control system
Load-sensing system
Joystick controls
High-flow auxiliary
Hydraulic quick coupler ready
Bucket leveling

CABIN
ROPS/FOPS certification
Sun Visor
Air-suspension seat (cloth)
Seat belt, retractable
Armrest
7’ Touchscreen display
Auto air condtioner / Heat

ELECTRICAL
Battery disconnect switch
12V system
AM/FM Bluetooth radio
Back up alarm
Cab mounted LED work lights

OTHER
Tracks: Rubber, two patterns
Rear door dual-layer
Cab > 60°
Drawbar hitch

OEM ATTACHMENTS

72” Standard Duty Low Pro Bucket w/BOE
72” Standard Duty Low Pro Bucket w/BOT
72” Low Pro Dirt Bucket w/ BOE & Side Cutters
72” Low Pro Dirt Bucket w/ Teeth & Side Cutters
78” Multi-Purpose Bucket w/ BOE & Side Cutters
78” Multi-Purpose Bucket w/ Teeth & Side Cutters
72” Skeleton Grapple
72” Scrap Grapple w/ BOE
Auger Drive–2” Hex 15–25 GPM
72” Pick Up Broom w/ Combo Wafers
84” Angle Broom w/ Hyd Angle & Electrical Plug
90” Power Rake w/ Hyd Angle & Electrical Plug
72” Open Front Brush Cutter 25–33 GPM, 6” Capacity
72” Closed Front Brush Cutter 25–33 GPM, 4” Capacity
96” Snow/Light Material Bucket w/ BOE
72” Snow Blower 33–42 GPM w/ Electrical Plug
48” Trencher 25-33 GPM w/ 6” Terminator Plug
60” Trencher 25–33 GPM w/ 6” Rock & Frost Chain
5,500 lbs Rail Pallet Fork–Hi-Vis 1 1/2” x 48” Tines

In the interest of continual equipment development, SANY America Inc. reserves the right to change these specifications at any time without prior notification.
©2026 SANY America Inc. HEXPS26ST230V001

In the interest of continual equipment development, SANY America Inc. reserves the right to change these specifications at any time without prior notification.
©2026 SANY America Inc. HEXPS26ST230V001