



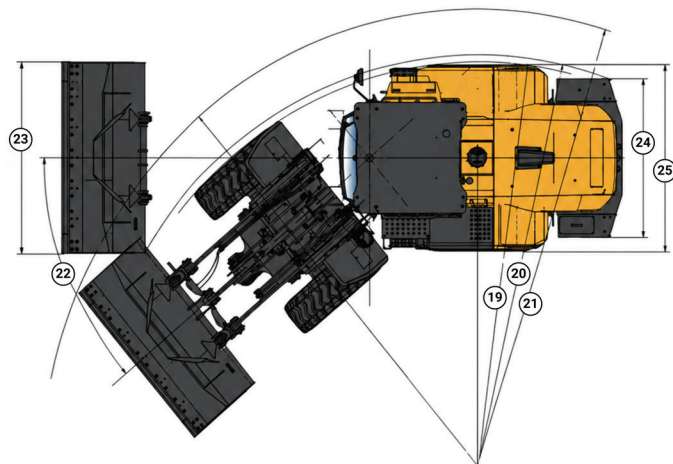

DIMENSIONS

|    |                                                   |         |
|----|---------------------------------------------------|---------|
| 1  | Ground Clearance                                  | 1.3 ft  |
| 2  | Height to Top of Cab                              | 11.0 ft |
| 3  | Height to Top of Beacon                           | 11.9 ft |
| 4  | Center Line of Rear Axle to Edge of Counterweight | 6.7 ft  |
| 5  | Wheelbase                                         | 9.8 ft  |
| 6  | Center Line of Front Axle to Center Pivot         | 4.9 ft  |
| 7  | Shipping Length without Attachment                | 21.3 ft |
| 8  | Shipping Length with Bucket                       | 25.7 ft |
| 9  | Max. Dump Height                                  | 17.4 ft |
| 10 | Hinge Pin Height at Max. Lift                     | 12.6 ft |
| 11 | Dump Clearance at Max. Lift                       | 8.8 ft  |
| 12 | Dig Depth, Level Bucket                           | 0.4 ft  |
| 13 | Reach at Max. Lift and 45° Discharge              | 4.0 ft  |
| 14 | Roll Back at Max. Lift                            | 62°     |
| 15 | Dump Angle at Max. Lift and Dump                  | 44°     |
| 16 | Roll Back at Carry Height                         | 46°     |
| 17 | Roll Back at Ground                               | 42°     |
| 18 | Tail Angle to the Rear Wheel                      | 28°     |
| 19 | Clearance Circle to Outside of Tires              | 17.7 ft |
| 20 | Clearance Circle to Counterweight                 | 18.0 ft |
| 21 | Max. Circle                                       | 20.0 ft |
| 22 | Articulation Angle                                | 40°     |
| 23 | Width Of Bucket                                   | 8.3 ft  |
| 24 | Counterweight Width                               | 6.9 ft  |
| 25 | Overall Tire Width                                | 8.1 ft  |

In the interest of continual equipment development, SANY America Inc. reserves the right to change these specifications at any time without prior notification.  
©2026 SANY America Inc. HEXPS26SW940L001

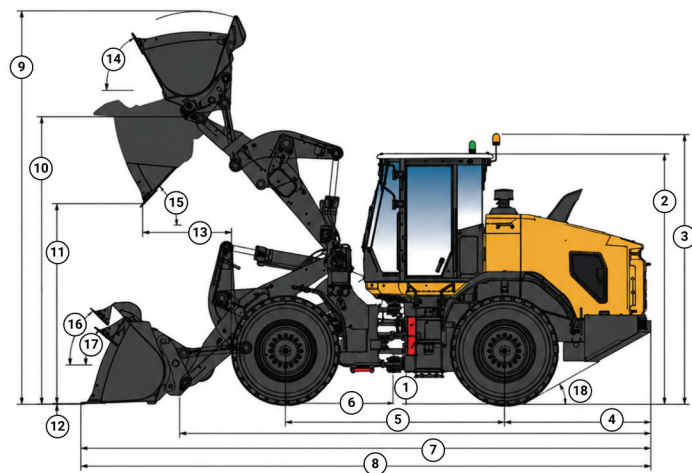

\*Warranty applies to 2026 Excavator and Wheel Loader models

SANY America Inc. 318 SANY Way  
Peachtree City, Georgia 30269  
470.552.SANY sanyamerica.com



sanyamerica.com ||| SW940L

SW940L

3-YARD  
WHEEL LOADER

32,849 LBS OPERATING WEIGHT  
173 HP NET ENGINE POWER  
3.2 YD<sup>3</sup> BUCKET CAPACITY



TECHNICAL SPECIFICATIONS

WEIGHT

|                  |            |
|------------------|------------|
| Operating Weight | 32,849 lbs |
|------------------|------------|

ENGINE

|                            |                             |
|----------------------------|-----------------------------|
| Engine Model               | Cummins B6.7                |
| Non-Road Emission Standard | EPA Final Tier 4/EU Stage V |
| Cylinders                  | 6                           |
| Displacement               | 6.7 L                       |
| Rated Engine Power         | 173 hp                      |
| Max. Gross Torque          | 826 lbs.-ft.                |

OPERATING CAPACITY

|                                |                     |
|--------------------------------|---------------------|
| Bucket Capacity (Heaped)       | 3.2 yd <sup>3</sup> |
| Breakout Force                 | 27,652 lbf          |
| Tipping Load Straight          | 22,818 lbs          |
| Tipping Load @ Full Turn       | 19,731 lbs          |
| Clearance (max. lift 45° dump) | 9' 1"               |
| Reach (max. lift 45° dump)     | 3' 10"              |

AXLES/BRAKES & TIRES

|                             |                   |
|-----------------------------|-------------------|
| Manufacturer (Front / Rear) | ZF/ZF             |
| Front Axle                  | Fixed             |
| Front Axle (Differential)   | Locking           |
| Rear Axle                   | Oscillating       |
| Rear Axle (Differential)    | Open              |
| Service Brakes              | Wet Disc          |
| Parking Brake               | Disc Brake        |
| Tires                       | 20.5R25 L3 Radial |

TRANSMISSION

|                        |                              |
|------------------------|------------------------------|
| Manufacturer and Model | ZF 4WG190                    |
| Type                   | Countershaft, PowerShift     |
| Shift Modes            | Automatic, Manual, Kick Down |
| Forward Gear 1-4       | 4-25 mph                     |
| Reverse Gear 1-3       | 4-17 mph                     |

\*Operating weight is for the SW940L with no attachments, and standard stick.  
SANY America Inc. reserves the right to change these specifications at any time without prior notification. ©2026 SANY America Inc. HEXPS26SW940L001

sanyamerica.com ||| SW940L

3-YARD

WHEEL LOADER

SW940L

STANDARD, OPTIONAL AND AFTERMARKET FEATURES

STANDARD EQUIPMENT (Standard Trim Level)

| OPERATOR ENVIRONMENT & FUNCTIONALITY            |
|-------------------------------------------------|
| ROPS/FOPS Certified Cabin                       |
| Orbital (Wheel) Steering                        |
| Telescoping Steering Column                     |
| Integrated Bluetooth Radio                      |
| Air Suspension Seat (Heated Seat)               |
| Rear-view (Reverse) Camera – Integrated Display |
| Side Mirrors – Heated                           |
| Interior Sunscreen (Front and Rear)             |
| Rear Window Electric Heating (Defrosting)       |
| Function   Bucket Shake                         |
| Function   Parallel Lift                        |
| Function   Soft stop (Boom and Bucket)          |
| POWERTRAIN & GUARDING                           |
| Locking Differential (Front)                    |
| Fenders (Full Coverage)                         |
| Machine guarding (Undercarriage)                |
| HYDRAULICS                                      |
| Auxiliary Flow, Third Function                  |
| Ride Control System                             |
| ELECTRICAL & LIGHTING                           |
| Reversible Machine Cooling Fan                  |
| Exterior LED Machine Lights                     |
| Engine Compartment LED Lights                   |
| Roof Mounted Warning Light Beacon, Strobe       |
| Over-The-Air (OTA) Automatic System Updates     |
| ATTACHMENTS                                     |
| 3.2 yd Bucket (General Purpose   Hook-On)       |
| JRB 416 Coupler (Hydraulic Quick-Coupler)       |

OPTIONAL EQUIPMENT (Premium Trim Level)

| OPERATOR ENVIRONMENT & FUNCTIONALITY                  |
|-------------------------------------------------------|
| Air suspension Seat (Heated & Ventilated Seat)        |
| Multi View (360) Camera – Secondary Dedicated Display |
| Rear Object Detection System                          |
| Side Mirrors – Heated & Electrically Adjustable       |
| Seat Belt Status Monitoring Indicator                 |
| Function   Intelligent On-board Payload Scale         |
| POWERTRAIN & GUARDING                                 |
| Tire Pressure Monitoring System (TPMS)                |
| HYDRAULICS                                            |
| Automatic Lubrication System (Auto Grease)            |
| ELECTRICAL & LIGHTING                                 |
| Cold Weather Package (Engine Block Heater)            |

AFTERMARKET EQUIPMENT (Contact Dealer to Order)

| MACHINE GUARDING                                 |
|--------------------------------------------------|
| Front Windshield Mesh Guarding (Window Mesh)     |
| Rear Anti-Collision Beam (Rear Machine Guarding) |

32,849 LBS OPERATING WEIGHT

173 HP NET ENGINE POWER

3.2 YD<sup>3</sup> BUCKET CAPACITY

OTHER SPECIFICATIONS

| HYDRAULIC SYSTEM     |                                   |
|----------------------|-----------------------------------|
| Manufacturer         | Hengli (SANY Optimized)           |
| Max Flow             | 58 gpm                            |
| Max Pressure         | 3,626 psi                         |
| Loader Controls      | Joystick Electric-over-hydraulic  |
| Auxiliary Hydraulics | 3 <sup>rd</sup> Function Standard |
| Steering Type        | Hydraulic Articulated             |
| Articulation Angle   | +/-40°                            |

| HYDRAULIC CYCLE TIMES |          |
|-----------------------|----------|
| Raise                 | 5.4 sec  |
| Dump                  | 1.6 sec  |
| Float Down            | 3.2 sec  |
| Total Cycle Time      | 10.2 sec |

| SERVICE CAPACITIES |          |
|--------------------|----------|
| Fuel Tank          | 62.3 gal |
| Cooling System     | 8.2 gal  |
| Engine Crankcase   | 4.0 gal  |
| Transmission       | 12.7 gal |
| Front Axle         | 9.2 gal  |
| Rear Axle          | 9.2 gal  |
| Hydraulic Tank     | 29.1 gal |
| DEF Tank           | 5.8 gal  |

| ELECTRICAL SYSTEM            |          |
|------------------------------|----------|
| Electrical system            | 24 volt  |
| Battery (Model)              | 6-QW-120 |
| Battery (Voltage)            | 12 Volt  |
| Battery (Quantity)           | 2        |
| Battery (Capacity)           | 120 Ah   |
| Battery (Cold Cranking Amps) | 680 Amp  |

In the interest of continual equipment development, SANY America Inc. reserves the right to change these specifications at any time without prior notification.

©2026 SANY America Inc. HEXPS26SW940L001

In the interest of continual equipment development, SANY America Inc. reserves the right to change these specifications at any time without prior notification.

©2026 SANY America Inc. HEXPS26SW940L001